




■ 构造图 Construction

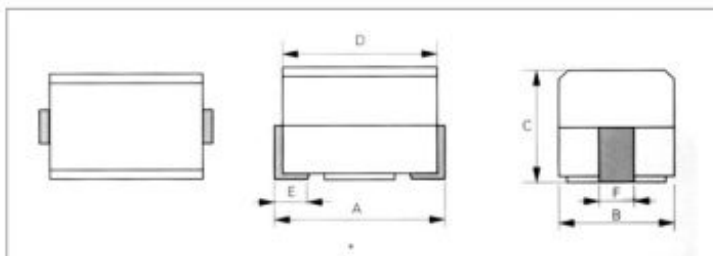

■ 产品特点 FEATURES&APPLICATIONS

耐机械冲击和机械压力
Resistant to mechanical shocks or pressures
尺寸精确, 为表面自动安装提供保证
Accurate dimensions for automatically surface mounting
本系列产品直流电阻小、允许通过电流大,
适用在机电产品的电源线路中
This series is low DC resistance, high current, applicable
in the power line of mechanical and electrical products.

■ 应用领域 APPLICATIONS

摄、录像机 VCRs, video cameras
汽车音响系统 Automobile audio systems
电脑及其周边产品 Computer products and peripherals
液晶电视接收机及其他液晶显示器等
LCD&LED televisions, monitors, etc.

■ 产品标识 Product Identification


| | | | |
|------------|------------|-------------------|-----------------|
| JWI | 45 | —4R7 | K |
| ↓ | ↓ | ↓ | ↓ |
| 型号 Type | 尺寸 Size | 电感量 Inductance | 公差 Tolerance |

■ 外形尺寸 Dimensions(mm)

| 型号 TYPE | 外形尺寸 DIMENSIONS(mm) | | | | | |
|-------------|---------------------|---------|---------|---------|-----------|-----------|
| | A | B | C | D | E | F |
| JWI1252018 | 2.5±0.2 | 2.0±0.2 | 1.8±0.2 | 2.2±0.2 | 0.5±0.15 | 1.2±0.1 |
| JWI1322522 | 3.2±0.3 | 2.5±0.2 | 2.2±0.2 | 2.9±0.2 | 0.75±0.15 | 1.0±0.15 |
| JWI1453232 | 4.5±0.3 | 3.2±0.2 | 3.2±0.2 | 4.2±0.2 | 1.0±0.15 | 1.35±0.25 |
| JWI1453232A | 4.5±0.3 | 3.2±0.2 | 3.2±0.2 | 4.2±0.2 | 1.0±0.15 | 1.35±0.25 |

■ 建议安装尺寸 Recommended installation dimension

| 型号 TYPE | A (参考值REF) | B (参考值REF) | C (参考值REF) |
|--------------|---------------|---------------|---------------|
| JWI25 | 1.0 | 1.5 | 1.5 |
| JWI32 | 1.0 | 2.0 | 2.0 |
| JWI45/JWI45A | 1.5 | 3.0 | 2.8 |

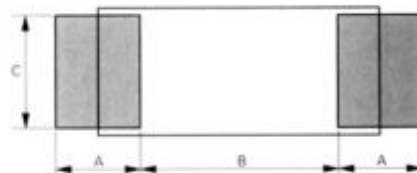

■ 包装 Package

| 型号 TYPE | JWI252018 | JWI322522 | JWI453232(A) |
|-----------------|-----------|-----------|--------------|
| 数量/卷 Q' TY/RELL | 2000 | 2000 | 500 |

JWI 模压型线绕片式电感器

Wound Chip Inductor



| 规格 PartNO. | 标称电感量 Inductance (μ H) | 标称电感量 测试电压/频率 Testfrequency Vac/MHz | Q值 Qvalue (min) | Q值测试电压, 频率 Testfrequencyfor Qvalue Vac/MHz | 自谐振频率 SRF MHZ | 直流电阻 RDC MAX(Ω) | 直流电流 IDC MAX(mA) |
|---------------|-----------------------------------|--|-----------------------|---|---------------------|--------------------------------|------------------------|
| JWI25-R22 | 0.22 | 0.1/25.2 | 30 | 0.1/25.2 | 450 | 0.5 | 430 |
| JWI25-R27 | 0.27 | 0.1/25.2 | 30 | 0.1/25.2 | 425 | 0.55 | 420 |
| JWI25-R33 | 0.33 | 0.1/25.2 | 30 | 0.1/25.2 | 400 | 0.6 | 400 |
| JWI25-R39 | 0.39 | 0.1/25.2 | 30 | 0.1/25.2 | 375 | 0.65 | 375 |
| JWI25-R47 | 0.47 | 0.1/25.2 | 30 | 0.1/25.2 | 350 | 0.68 | 350 |
| JWI25-R56 | 0.56 | 0.1/25.2 | 30 | 0.1/25.2 | 325 | 0.75 | 325 |
| JWI25-R68 | 0.68 | 0.1/25.2 | 30 | 0.1/25.2 | 300 | 0.85 | 300 |
| JWI25-R82 | 0.82 | 0.1/25.2 | 30 | 0.1/25.2 | 260 | 1 | 260 |
| JWI25-1R0 | 1 | 0.1/7.96 | 30 | 0.1/7.96 | 245 | 1.1 | 245 |
| JWI25-1R2 | 1.2 | 0.1/7.96 | 30 | 0.1/7.96 | 230 | 1.2 | 230 |
| JWI25-1R5 | 1.5 | 0.1/7.96 | 30 | 0.1/7.96 | 182 | 1.3 | 220 |
| JWI25-1R8 | 1.8 | 0.1/7.96 | 30 | 0.1/7.96 | 135 | 1.45 | 210 |
| JWI25-2R2 | 2.2 | 0.1/7.96 | 30 | 0.1/7.96 | 105 | 1.55 | 200 |
| JWI25-2R7 | 2.7 | 0.1/7.96 | 30 | 0.1/7.96 | 70 | 1.7 | 195 |
| JWI25-3R3 | 3.3 | 0.1/7.96 | 30 | 0.1/7.96 | 55 | 1.9 | 185 |
| JWI25-3R9 | 3.9 | 0.1/7.96 | 30 | 0.1/7.96 | 48 | 2.1 | 180 |
| JWI25-4R7 | 4.7 | 0.1/7.96 | 30 | 0.1/7.96 | 43 | 2.3 | 175 |
| JWI25-5R6 | 5.6 | 0.1/7.96 | 25 | 0.1/7.96 | 42 | 2.5 | 170 |
| JWI25-6R8 | 6.8 | 0.1/7.96 | 25 | 0.1/7.96 | 39 | 2.7 | 165 |
| JWI25-8R2 | 8.2 | 0.1/7.96 | 25 | 0.1/7.96 | 36 | 3.05 | 160 |
| JWI25-100 | 10 | 0.1/2.52 | 25 | 0.1/2.52 | 33 | 3.5 | 155 |
| JWI25-120 | 12 | 0.1/2.52 | 25 | 0.1/2.52 | 30 | 3.8 | 150 |
| JWI25-150 | 15 | 0.1/2.52 | 25 | 0.1/2.52 | 26 | 4.4 | 140 |
| JWI25-180 | 18 | 0.1/2.52 | 25 | 0.1/2.52 | 24 | 4.8 | 130 |
| JWI25-220 | 22 | 0.1/2.52 | 25 | 0.1/2.52 | 22 | 5.5 | 125 |
| JWI25-270 | 27 | 0.1/2.52 | 25 | 0.1/2.52 | 21 | 6.3 | 115 |
| JWI25-330 | 33 | 0.1/2.52 | 25 | 0.1/2.52 | 20 | 7.1 | 110 |
| JWI25-390 | 39 | 0.1/2.52 | 20 | 0.1/2.52 | 18 | 9.5 | 90 |
| JWI25-470 | 47 | 0.1/2.52 | 20 | 0.1/2.52 | 17 | 11.1 | 80 |
| JWI25-560 | 56 | 0.1/2.52 | 20 | 0.1/2.52 | 16 | 12.1 | 75 |
| JWI25-680 | 68 | 0.1/2.52 | 20 | 0.1/2.52 | 15 | 16.6 | 70 |
| JWI25-820 | 82 | 0.1/2.52 | 20 | 0.1/2.52 | 13 | 19 | 66 |
| JWI25-101 | 100 | 0.1/0.796 | 15 | 0.1/0.796 | 12 | 21 | 60 |

JWI 模压型线绕片式电感器

Wound Chip Inductor



昌盛股份
股票代码: 430503

| 规格 PartNO. | 标称电感量 Inductance (μ H) | 标称电感量 测试电压/频率 Testfrequency Vac/MHz | Q值 Qvalue (min) | Q值测试电压, 频率 TestfrequencyOr Qvalue Vac/MHz | 自谐频率 SRF MHZ | 直流电阻 RDC MAX(Ω) | 直流电流 IDC MAX(mA) |
|---------------|-----------------------------------|--|-----------------------|--|--------------------|--------------------------------|------------------------|
| JWI32-R10 | 0.1 | 0.25/25.2 | 30 | 0.25/25.2 | 500 | 0.22 | 450 |
| JWI32-R12 | 0.12 | 0.25/25.2 | 30 | 0.25/25.2 | 500 | 0.22 | 450 |
| JWI32-R15 | 0.15 | 0.25/25.2 | 30 | 0.25/25.2 | 450 | 0.25 | 450 |
| JWI32-R18 | 0.18 | 0.25/25.2 | 30 | 0.25/25.2 | 400 | 0.28 | 450 |
| JWI32-R22 | 0.22 | 0.25/25.2 | 30 | 0.25/25.2 | 350 | 0.32 | 450 |
| JWI32-R27 | 0.27 | 0.25/25.2 | 30 | 0.25/25.2 | 320 | 0.36 | 450 |
| JWI32-R33 | 0.33 | 0.25/25.2 | 30 | 0.25/25.2 | 300 | 0.4 | 450 |
| JWI32-R39 | 0.39 | 0.25/25.2 | 30 | 0.25/25.2 | 250 | 0.45 | 450 |
| JWI32-R47 | 0.47 | 0.25/25.2 | 30 | 0.25/25.2 | 220 | 0.5 | 450 |
| JWI32-R56 | 0.56 | 0.25/25.2 | 30 | 0.25/25.2 | 180 | 0.55 | 450 |
| JWI32-R68 | 0.68 | 0.25/25.2 | 30 | 0.25/25.2 | 160 | 0.6 | 450 |
| JWI32-R82 | 0.82 | 0.25/25.2 | 30 | 0.25/25.2 | 140 | 0.65 | 450 |
| JWI32-1R0 | 1 | 0.25/7.96 | 30 | 0.25/7.96 | 120 | 0.7 | 400 |
| JWI32-1R2 | 1.2 | 0.25/7.96 | 30 | 0.25/7.96 | 100 | 0.75 | 390 |
| JWI32-1R5 | 1.5 | 0.25/7.96 | 30 | 0.25/7.96 | 85 | 0.85 | 370 |
| JWI32-1R8 | 1.8 | 0.25/7.96 | 30 | 0.25/7.96 | 80 | 0.9 | 350 |
| JWI32-2R2 | 2.2 | 0.25/7.96 | 30 | 0.25/7.96 | 75 | 1 | 320 |
| JWI32-2R7 | 2.7 | 0.25/7.96 | 30 | 0.25/7.96 | 70 | 1.1 | 290 |
| JWI32-3R3 | 3.3 | 0.25/7.96 | 30 | 0.25/7.96 | 60 | 1.2 | 260 |
| JWI32-3R9 | 3.9 | 0.25/7.96 | 30 | 0.25/7.96 | 55 | 1.3 | 250 |
| JWI32-4R7 | 4.7 | 0.25/7.96 | 30 | 0.25/7.96 | 50 | 1.5 | 220 |
| JWI32-5R6 | 5.6 | 0.25/7.96 | 30 | 0.25/7.96 | 47 | 1.6 | 200 |
| JWI32-6R8 | 6.8 | 0.25/7.96 | 30 | 0.25/7.96 | 43 | 1.8 | 180 |
| JWI32-8R2 | 8.2 | 0.25/7.96 | 30 | 0.25/7.96 | 40 | 2 | 170 |
| JWI32-100 | 10 | 0.25/2.52 | 30 | 0.25/2.52 | 36 | 2.1 | 150 |
| JWI32-120 | 12 | 0.25/2.52 | 30 | 0.25/2.52 | 33 | 2.5 | 140 |
| JWI32-150 | 15 | 0.25/2.52 | 30 | 0.25/2.52 | 28 | 2.8 | 130 |
| JWI32-180 | 18 | 0.25/2.52 | 30 | 0.25/2.52 | 25 | 3.3 | 120 |
| JWI32-220 | 22 | 0.25/2.52 | 30 | 0.25/2.52 | 23 | 3.7 | 100 |
| JWI32-270 | 27 | 0.25/2.52 | 30 | 0.25/2.52 | 18 | 5 | 80 |
| JWI32-330 | 33 | 0.25/2.52 | 30 | 0.25/2.52 | 17 | 5.6 | 70 |
| JWI32-390 | 39 | 0.25/2.52 | 30 | 0.25/2.52 | 16 | 6.4 | 65 |
| JWI32-470 | 47 | 0.25/2.52 | 30 | 0.25/2.52 | 15 | 7 | 60 |
| JWI32-560 | 56 | 0.25/2.52 | 30 | 0.25/2.52 | 13 | 8 | 55 |
| JWI32-680 | 68 | 0.25/2.52 | 30 | 0.25/2.52 | 12 | 9 | 50 |
| JWI32-820 | 82 | 0.25/2.52 | 30 | 0.25/2.52 | 11 | 10 | 45 |

JWI 模压型线绕片式电感器

Wound Chip Inductor



昌盛股份
股票代码: 430503

| 规格 PartNO. | 标称电感量 Inductance (μ H) | 标称电感量 测试电压/频率 Testfrequency Vac/MHz | Q值 Qvalue (min) | Q值测试电压, 频率 TestfrequencyOr Qvalue Vac/MHz | 自谐振频率 SRF MHZ | 直流电阻 RDC MAX(Ω) | 直流电流 IDC MAX(mA) |
|---------------|-----------------------------------|--|-----------------------|--|---------------------|--------------------------------|------------------------|
| JWI32-R10 | 0.1 | 0.25/25.2 | 30 | 0.25/25.2 | 500 | 0.22 | 450 |
| JWI32-R12 | 0.12 | 0.25/25.2 | 30 | 0.25/25.2 | 500 | 0.22 | 450 |
| JWI32-R15 | 0.15 | 0.25/25.2 | 30 | 0.25/25.2 | 450 | 0.25 | 450 |
| JWI32-R18 | 0.18 | 0.25/25.2 | 30 | 0.25/25.2 | 400 | 0.28 | 450 |
| JWI32-R22 | 0.22 | 0.25/25.2 | 30 | 0.25/25.2 | 350 | 0.32 | 450 |
| JWI32-R27 | 0.27 | 0.25/25.2 | 30 | 0.25/25.2 | 320 | 0.36 | 450 |
| JWI32-R33 | 0.33 | 0.25/25.2 | 30 | 0.25/25.2 | 300 | 0.4 | 450 |
| JWI32-R39 | 0.39 | 0.25/25.2 | 30 | 0.25/25.2 | 250 | 0.45 | 450 |
| JWI32-R47 | 0.47 | 0.25/25.2 | 30 | 0.25/25.2 | 220 | 0.5 | 450 |
| JWI32-R56 | 0.56 | 0.25/25.2 | 30 | 0.25/25.2 | 180 | 0.55 | 450 |
| JWI32-R68 | 0.68 | 0.25/25.2 | 30 | 0.25/25.2 | 160 | 0.6 | 450 |
| JWI32-R82 | 0.82 | 0.25/25.2 | 30 | 0.25/25.2 | 140 | 0.65 | 450 |
| JWI32-1R0 | 1 | 0.25/7.96 | 30 | 0.25/7.96 | 120 | 0.7 | 400 |
| JWI32-1R2 | 1.2 | 0.25/7.96 | 30 | 0.25/7.96 | 100 | 0.75 | 390 |
| JWI32-1R5 | 1.5 | 0.25/7.96 | 30 | 0.25/7.96 | 85 | 0.85 | 370 |
| JWI32-1R8 | 1.8 | 0.25/7.96 | 30 | 0.25/7.96 | 80 | 0.9 | 350 |
| JWI32-2R2 | 2.2 | 0.25/7.96 | 30 | 0.25/7.96 | 75 | 1 | 320 |
| JWI32-2R7 | 2.7 | 0.25/7.96 | 30 | 0.25/7.96 | 70 | 1.1 | 290 |
| JWI32-3R3 | 3.3 | 0.25/7.96 | 30 | 0.25/7.96 | 60 | 1.2 | 260 |
| JWI32-3R9 | 3.9 | 0.25/7.96 | 30 | 0.25/7.96 | 55 | 1.3 | 250 |
| JWI32-4R7 | 4.7 | 0.25/7.96 | 30 | 0.25/7.96 | 50 | 1.5 | 220 |
| JWI32-5R6 | 5.6 | 0.25/7.96 | 30 | 0.25/7.96 | 47 | 1.6 | 200 |
| JWI32-6R8 | 6.8 | 0.25/7.96 | 30 | 0.25/7.96 | 43 | 1.8 | 180 |
| JWI32-8R2 | 8.2 | 0.25/7.96 | 30 | 0.25/7.96 | 40 | 2 | 170 |
| JWI32-100 | 10 | 0.25/2.52 | 30 | 0.25/2.52 | 36 | 2.1 | 150 |
| JWI32-120 | 12 | 0.25/2.52 | 30 | 0.25/2.52 | 33 | 2.5 | 140 |
| JWI32-150 | 15 | 0.25/2.52 | 30 | 0.25/2.52 | 28 | 2.8 | 130 |
| JWI32-180 | 18 | 0.25/2.52 | 30 | 0.25/2.52 | 25 | 3.3 | 120 |
| JWI32-220 | 22 | 0.25/2.52 | 30 | 0.25/2.52 | 23 | 3.7 | 100 |
| JWI32-270 | 27 | 0.25/2.52 | 30 | 0.25/2.52 | 18 | 5 | 80 |
| JWI32-330 | 33 | 0.25/2.52 | 30 | 0.25/2.52 | 17 | 5.6 | 70 |
| JWI32-390 | 39 | 0.25/2.52 | 30 | 0.25/2.52 | 16 | 6.4 | 65 |
| JWI32-470 | 47 | 0.25/2.52 | 30 | 0.25/2.52 | 15 | 7 | 60 |
| JWI32-560 | 56 | 0.25/2.52 | 30 | 0.25/2.52 | 13 | 8 | 55 |
| JWI32-680 | 68 | 0.25/2.52 | 30 | 0.25/2.52 | 12 | 9 | 50 |
| JWI32-820 | 82 | 0.25/2.52 | 30 | 0.25/2.52 | 11 | 10 | 45 |

JWI 模压型线绕片式电感器

Wound Chip Inductor



昌盛股份
股票代码: 430500

| 规格 PartNO. | 标称电感量 Inductance (μ H) | 标称电感量 测试电压/频率 Testfrequency Vac/MHz | Q值 Qvalue (min) | Q值测试电压, 频率 Testfrequencyfor Qvalue Vac/MHz | 自谐频率 SRF MHZ | 直流电阻 RDC MAX(Ω) | 直流电流 IDC MAX(mA) |
|---------------|-----------------------------------|--|-----------------------|---|--------------------|--------------------------------|------------------------|
| JWI45-R10 | 0.1 | 0.25/25.2 | 35 | 0.25/25.2 | 300 | 0.2 | 800 |
| JWI45-R12 | 0.12 | 0.25/25.2 | 35 | 0.25/25.2 | 280 | 0.2 | 770 |
| JWI45-R15 | 0.15 | 0.25/25.2 | 35 | 0.25/25.2 | 250 | 0.2 | 730 |
| JWI45-R18 | 0.18 | 0.25/25.2 | 40 | 0.25/25.2 | 220 | 0.2 | 700 |
| JWI45-R22 | 0.22 | 0.25/25.2 | 40 | 0.25/25.2 | 200 | 0.3 | 665 |
| JWI45-R27 | 0.27 | 0.25/25.2 | 40 | 0.25/25.2 | 180 | 0.3 | 635 |
| JWI45-R33 | 0.33 | 0.25/25.2 | 40 | 0.25/25.2 | 165 | 0.3 | 605 |
| JWI45-R39 | 0.39 | 0.25/25.2 | 40 | 0.25/25.2 | 150 | 0.3 | 575 |
| JWI45-R47 | 0.47 | 0.25/25.2 | 40 | 0.25/25.2 | 145 | 0.3 | 545 |
| JWI45-R56 | 0.56 | 0.25/25.2 | 40 | 0.25/25.2 | 140 | 0.4 | 520 |
| JWI45-R68 | 0.68 | 0.25/25.2 | 40 | 0.25/25.2 | 135 | 0.4 | 500 |
| JWI45-R82 | 0.82 | 0.25/25.2 | 40 | 0.25/25.2 | 130 | 0.5 | 475 |
| JWI45-1R0 | 1 | 0.25/7.96 | 50 | 0.25/7.96 | 100 | 0.5 | 450 |
| JWI45-1R2 | 1.2 | 0.25/7.96 | 50 | 0.25/7.96 | 80 | 0.6 | 430 |
| JWI45-1R5 | 1.5 | 0.25/7.96 | 50 | 0.25/7.96 | 70 | 0.6 | 410 |
| JWI45-1R8 | 1.8 | 0.25/7.96 | 50 | 0.25/7.96 | 65 | 0.7 | 390 |
| JWI45-2R2 | | 0.25/7.96 | 50 | 0.25/7.96 | 60 | 0.7 | 380 |
| JWI45-2R7 | 2.7 | 0.25/7.96 | 50 | 0.25/7.96 | 50 | 0.8 | 370 |
| JWI45-3R3 | 3.3 | 0.25/7.96 | 50 | 0.25/7.96 | 45 | 0.8 | 355 |
| JWI45-3R9 | 3.9 | 0.25/7.96 | 50 | 0.25/7.96 | 40 | 0.9 | 330 |
| JWI45-4R7 | 4.7 | 0.25/7.96 | 50 | 0.25/7.96 | 35 | 1 | 315 |
| JWI45-5R6 | 5.6 | 0.25/7.96 | 50 | 0.25/7.96 | 33 | 1.1 | 300 |
| JWI45-6R8 | 6.8 | 0.25/7.96 | 50 | 0.25/7.96 | 27 | 1.2 | 285 |
| JWI45-8R2 | 8.2 | 0.25/7.96 | 50 | 0.25/7.96 | 25 | 1.4 | 270 |
| JWI45-100 | 10 | 0.25/2.52 | 50 | 0.25/2.52 | 20 | 1.6 | 250 |
| JWI45-120 | 12 | 0.25/2.52 | 50 | 0.25/2.52 | 18 | 2 | 225 |
| JWI45-150 | 15 | 0.25/2.52 | 50 | 0.25/2.52 | 17 | 2.5 | 200 |
| JWI45-180 | 18 | 0.25/2.52 | 50 | 0.25/2.52 | 15 | 2.8 | 190 |
| JWI45-220 | 22 | 0.25/2.52 | 50 | 0.25/2.52 | 13 | 3.2 | 180 |
| JWI45-270 | 27 | 0.25/2.52 | 50 | 0.25/2.52 | 12 | 3.6 | 170 |
| JWI45-330 | 33 | 0.25/2.52 | 50 | 0.25/2.52 | 11 | 4 | 160 |
| JWI45-390 | 39 | 0.25/2.52 | 50 | 0.25/2.52 | 10 | 4.5 | 150 |
| JWI45-470 | 47 | 0.25/2.52 | 50 | 0.25/2.52 | 10 | 5 | 140 |
| JWI45-560 | 56 | 0.25/2.52 | 50 | 0.25/2.52 | 9 | 5.5 | 135 |
| JWI45-680 | 68 | 0.25/2.52 | 50 | 0.25/2.52 | 9 | 6 | 130 |
| JWI45-820 | 82 | 0.25/2.52 | 50 | 0.25/2.52 | 8 | 7 | 120 |
| JWI45-101 | 100 | 0.25/0.796 | 40 | 0.25/0.796 | 8 | 8 | 110 |
| JWI45-121 | 120 | 0.25/0.796 | 40 | 0.25/0.796 | 6 | 8 | 110 |
| JWI45-151 | 150 | 0.25/0.796 | 40 | 0.25/0.796 | 5 | 9 | 105 |
| JWI45-181 | 180 | 0.25/0.796 | 40 | 0.25/0.796 | 5 | 9.5 | 102 |
| JWI45-221 | 220 | 0.25/0.796 | 40 | 0.25/0.796 | 4 | 10 | 100 |
| JWI45-271 | 270 | 0.25/0.796 | 40 | 0.25/0.796 | 4 | 12 | 92 |
| JWI45-331 | 330 | 0.25/0.796 | 40 | 0.25/0.796 | 3.5 | 14 | 85 |
| JWI45-391 | 390 | 0.25/0.796 | 40 | 0.25/0.796 | 3 | 18 | 80 |
| JWI45-471 | 470 | 0.25/0.796 | 40 | 0.25/0.796 | 3 | 26 | 62 |
| JWI45-561 | 560 | 0.25/0.796 | 30 | 0.25/0.796 | 3 | 30 | 50 |
| JWI45-681 | 680 | 0.25/0.796 | 30 | 0.25/0.796 | 3 | 30 | 50 |
| JWI45-821 | 820 | 0.25/0.796 | 30 | 0.25/0.796 | 2.5 | 35 | 30 |

JWI 模压型线绕片式电感器

Wound Chip Inductor



昌盛股份
股票代码: 430503

| 规格 PartNO. | 标称电感量 Inductance (μ H) | 标称电感量 测试电压/频率 Testfrequency Vac/MHz | Q值 Qvalue (min) | Q值测试电压, 频率 Testfrequencyfor Qvalue Vac/MHz | 自谐频率 SRF MHZ | 直流电阻 RDC MAX(Ω) | 直流电流 IDC MAX(mA) |
|---------------|-----------------------------------|--|-----------------------|---|--------------------|--------------------------------|------------------------|
| JWI45A-1R0 | 1 | 0.25/7.96 | 10 | 0.25/7.96 | 200 | 0.11 | 1050 |
| JWI45A-1R2 | 1.2 | 0.25/7.96 | 10 | 0.25/7.96 | 160 | 0.12 | 1000 |
| JWI45A-1R5 | 1.5 | 0.25/7.96 | 10 | 0.25/7.96 | 130 | 0.15 | 950 |
| JWI45A-1R8 | 1.8 | 0.25/7.96 | 10 | 0.25/7.96 | 100 | 0.16 | 900 |
| JWI45A-2R2 | 2.2 | 0.25/7.96 | 10 | 0.25/7.96 | 80 | 0.18 | 850 |
| JWI45A-2R7 | 2.7 | 0.25/7.96 | 10 | 0.25/7.96 | 60 | 0.2 | 800 |
| JWI45A-3R3 | 3.3 | 0.25/7.96 | 10 | 0.25/7.96 | 45 | 0.22 | 750 |
| JWI45A-3R9 | 3.9 | 0.25/7.96 | 10 | 0.25/7.96 | 40 | 0.24 | 700 |
| JWI45A-4R7 | 4.7 | 0.25/7.96 | 10 | 0.25/7.96 | 35 | 0.27 | 650 |
| JWI45A-5R6 | 5.6 | 0.25/7.96 | 10 | 0.25/7.96 | 30 | 0.3 | 650 |
| JWI45A-6R8 | 6.8 | 0.25/7.96 | 10 | 0.25/7.96 | 28 | 0.35 | 600 |
| JWI45A-8R2 | 8.2 | 0.25/7.96 | 10 | 0.25/7.96 | 25 | 0.4 | 600 |
| JWI45A-100 | 10 | 0.25/2.52 | 10 | 0.25/2.52 | | 0.5 | 550 |
| JWI45A-120 | 12 | 0.25/2.52 | 10 | 0.25/2.52 | 21 | 0.6 | 500 |
| JWI45A-150 | 15 | 0.25/2.52 | 10 | 0.25/2.52 | 20 | 0.7 | 450 |
| JWI45A-180 | 18 | 0.25/2.52 | 10 | 0.25/2.52 | 19 | 0.8 | 400 |
| JWI45A-220 | 22 | 0.25/2.52 | 10 | 0.25/2.52 | 18 | 0.9 | 370 |
| JWI45A-270 | 27 | 0.25/2.52 | 10 | 0.25/2.52 | 16 | 1.2 | 330 |
| JWI45A-330 | 33 | 0.25/2.52 | 10 | 0.25/2.52 | 14 | 1.4 | 300 |
| JWI45A-390 | 39 | 0.25/2.52 | 10 | 0.25/2.52 | 12 | 1.6 | 280 |
| JWI45A-470 | 47 | 0.25/2.52 | 10 | 0.25/2.52 | 11.5 | 1.9 | 260 |
| JWI45A-560 | 56 | 0.25/2.52 | 10 | 0.25/2.52 | 11 | 2.2 | 240 |
| JWI45A-680 | 68 | 0.25/2.52 | 10 | 0.25/2.52 | 10 | 2.6 | |
| JWI45A-820 | 82 | 0.25/2.52 | 10 | 0.25/2.52 | 9 | 3.5 | 200 |
| JWI45A-101 | 100 | 0.25/0.796 | 20 | 0.25/0.796 | 8 | 4 | 180 |
| JWI45A-121 | 120 | 0.25/0.796 | 20 | 0.25/0.796 | 7.5 | 4.5 | 160 |
| JWI45A-151 | 150 | 0.25/0.796 | 20 | 0.25/0.796 | 7 | 6.5 | 140 |
| JWI45A-181 | 180 | 0.25/0.796 | 20 | 0.25/0.796 | 6.5 | 7.5 | 120 |
| JWI45A-221 | 220 | 0.25/0.796 | 20 | 0.25/0.796 | 6 | 9 | 120 |
| JWI45A-271 | 270 | 0.25/0.796 | 20 | 0.25/0.796 | 5.5 | 11 | 100 |
| JWI45A-331 | 330 | 0.25/0.796 | 20 | 0.25/0.796 | 4 | 13 | 90 |